

**EARSON®**  
USER MANUAL



OUTDOOR BLUETOOTH SPEAKER

**Mammoth**  
ER-160

**Mammoth**  
ER-160

**WARNING**

Don't place the product in the high temperature. Moist and place the product on a secure, stable surface. The product can cause serious damage if it fall.

Never open the product by yourself. It is an electrical shock hazards. If the repair is needed, It should be done by qualified electrician.

Take out all power cords immediately and do not use the product if damaged or water enter into the product with carelessness.

Do not maximize the volume when it is connected with the equipment which has output power. It causes sound if dispropotion.

Use the product only in indoor.

Unplug the product only in indoor.

Unplug the power outlet, if you won't use more than two days.

**Mammoth**  
ER-160

The speaker is USB power charging for Li-ion Battery, you'd better turn off the power when charging.


If turn on the power ,the LED indicator is not on or low battery, please full charge and use.

**Brief introduction**

This outdoor Bluetooth portable speaker built-in Bluetooth V2.1+EDR(A2DP), with voice prompts and hands- free function, ALC and D digital amplifier, support Audio LINE-IN , TF card read, MP3/WAV audio format. The speaker will be off after 10 minutes if no music play of Bluetooth, TF card input and LINE-IN.

**Mammoth**  
ER-160


**Functions**

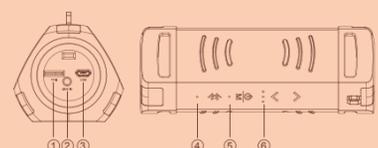

1. MICRO USB charge port (5V 500mA)
2. TF card port ( supporting 32G)
3. Φ3.5 mm audio Line -IN port
4. Power LED
5. MIC
6. LED Battery indicator

**Mammoth**  
ER-160

**Button functi**

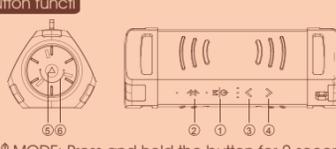

1. MODE: Press and hold the button for 2 second to POWER ON/OFF, short press the button to mode switch ( Bluetooth, TF card and LINE-IN, TF card insert or LINE-IN play in priority )
2. Bluetooth pairing :Press and hold the button for 2 second to Bluetooth pairing new device, short press the button to reconnect the last device .
3. < Previous track
4. > Next track
5. Δ Short press the button is play/pause (in LINE-IN model ,short press the button is mute or off)
6. Rotary on-volume control

(Tips: if press the button is invalid, please press" Δ "and hold for 7 second to automatic reset)

**Mammoth**  
ER-160

**Using the speaker**

- 4.1 Bluetooth: Press and hold "MODE" to power on, default Bluetooth mode and automatically pairing with a voice prompt, the Bluetooth LED will flash quickly, turn your device Bluetooth on and search for new device, when the speaker "ER160" appear in the list ,select it and if ask for the password,enter"0000" . the Bluetooth LED turn solid with a voice prompt, the speaker will then be connected to your device.
- 4.2 Hands free: when you have an incoming call, the music under Bluetooth mode will pause, press "Δ"once to answer the call, press "Δ" once to end the call, long press "Δ"not to answer the call. The call volume is adjustable, once the call end and back to the music.
- 4.3 To pair additional device to the speaker, first press and hold"MODE"for 2 second to make sure that the Bluetooth is turned off on any devices that have been paired with the speaker and into the Bluetooth pairing mode, then follow the above instruction.

**Mammoth**  
ER-160

- 4.4 LINE-IN: Insert Φ3.5mm audio cable and switch to LINE-IN with a voice prompt "LINE-IN".
- 4.5 TF card : Insert TF card and switch to TF play with a voice prompt "TF card".
- 4.6 Power charging and low battery indicator: three-level battery indicator and power charging indicator, full charged the three indicators are on. If low battery ,the power indicator is flashing and with a beep.
- 4.7 USB connecting : in the TF card mode, insert the MICRO USB cable with the computer USB port, it will be a voice prompt" memory card reader mode" that means the computer connected with the speaker and can read the memory card.( the mode switch order is Bluetooth, TF card, LINE-IN, Memory card).

**Mammoth**  
ER-160

**Specification**

Battery :3.7V Li-ion Battery 1500mAh  
Bluetooth transmission power :Class 2  
Bluetooth working frequency:2402MHz-2480MHz  
Frequency response:60-20000Hz  
SNR: 65db  
Distortion factor:≤1%

**Box content**

1. Manual	1 PCS
2. φ3.5mm signal cable	1 PCS
3. MICRO USB cable	1 PCS
4. Key ring	1 PCS

东莞耳神电声科技有限公司

型号: ER-160 内销 英文使用手册

设计:

技术要求

1. 检验外观是否良好,不可有异色、杂色、印刷模糊、漏字、重影、污迹、破损、断字等。
2. 适力擦拭丝印部分,应无掉油、模糊等不良现象。
3. 丝印颜色是否符合工厂或客户要求。
4. 检测材质是否符合要求。

规格: 65\*103.5MM

审核:

材质: 120G牛皮纸 正反面印刷

批准:

料号: E38-A0160-A02

时间:

图号:

比例:

版次:

页次:

1/1